

(43) International Publication Date 21 October 2004 (21.10,2004)

PCT

(10) International Publication Number WO 2004/089575 A1

(51) International Patent Classification7: B05B 9/00 B23Q 11/10,

(21) International Application Number:

PCT/IB2004/001029

(22) International Filing Date: 5 April 2004 (05.04.2004)

(25) Filing Language:

Italian

(26) Publication Language:

English

(30) Priority Data:

MI2003A000676

7 April 2003 (07.04.2003) IT

- (71) Applicant (for all designated States except US): AUGES S.R.L. [IT/IT]; Viale A. Marazza, 54, I-28021 Borgomanero (IT).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): PIANA, Alessandro [IT/IT]; Via Fratelli Varalli, I-13010 Fraz. Roccapietra Varallo Sesia (IT). CAPRIOLI, Cristina [IT/IT]; Localitá Pianzaghi, I-28040 Massino Visconti (IT).


- (74) Agent: VALENTINI, Giuliano; Marietti, Gislon e Trupiano S.r.l., Via Lurga, 16, I-20122 Milan (IT).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

[Continued on next page]

(54) Title: DEVICE AND METHOD FOR DELIVERING A LUBRICATING AND/OR COOLING FLUID IN MACHINING

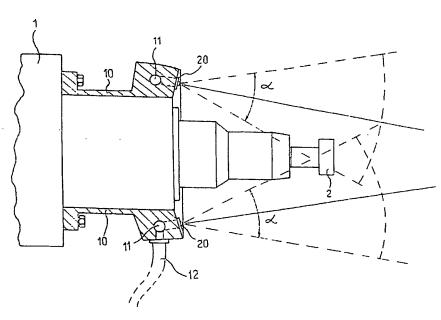

(57) Abstract: The invention concerns a method and a device to deliver a cooling and/or lubricating fluid near the contact area between a tool and a workpiece being mechanical machined, wherein some "airless" type nozzles are provided to atomize the lubricating/cooling fluid.

Best Available Cop

2004/089575 A1 |||||||

 before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.